SmartCam Full HD Wi-Fi Pan/Tilt SNH-V6410PN



SNH-V6410PN



reddot design award

Looking for smarter monitoring camera for home or business? SmartCam PT gives you "Peace of mind"

- Compact designed Pan/Tilt camera
- 1080p Full HD resolution
- Object Tracking
- Privacy Mode (Tilt 80)
- SDXC Memory Slot (Max. 128GB)
- Event Notification
- Motion Zone Select
- Night Vision to 16ft(5m)
- Wide Dynamic Range


















Dimensions

Unit:mm (inch)

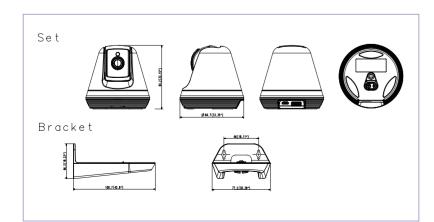

Contents

| | 0 41 4 | | |
|--------------|------------|--|--|
| Camera | | | |
| Marca . | | | |
| Wall Bracket | | | |
| | \$ | | |
| | 2ea (each) | | |

Specifications

| SNH-V6410PN | | | |
|----------------------------------|---|--|--|
| Video | | | |
| Imaging Device | 1/3" 2M Sensor | | |
| Effective Pixels | 1944(H) x 1092(V) | | |
| Scanning System | Progressive | | |
| Low Light Performance | 0.3Lux(Color), OLux(Black/White) | | |
| Lens | | | |
| Focal Length | 4.0mm | | |
| Angular Field of View(H/V/D) | D: 96.1°, H:80.9°, V:43.4° | | |
| Focus Control | Fixed Focus | | |
| Lens Distortion Correction | Off/On | | |
| Pan/Tilt/Rotate | | | |
| Pan Range | 350° (-175°~175°) | | |
| Tilt Range | 155°(-80° ~ +75°), Privacy mode (-80°) | | |
| Object Tracking | Off/On | | |
| Operational | | | |
| IRLED | 850nm | | |
| Viewable Length | 5m | | |
| Day & Night | True D/N (Auto) | | |
| Wide Dynamic Range | HDR | | |
| Contrast Enhancement | Auto | | |
| Digital Noise Reduction | Support (2D+3D Noise Filter) | | |
| Digital Image Stabilization | N/A | | |
| Motion Detection | Off/On | | |
| Audio Detection | Off/On | | |
| Privacy Mode | Off / Privacy Mode / Out of Sight Mode | | |
| White Balance | Auto | | |
| Digital Zoom | 4x(Mobile), 10x(web) | | |
| Flip / Mirror | Off/On | | |
| Intelligent Video Analytics | Motion Zone Selection | | |
| Memory Slot | SDXC Memory Slot (Max 128GB) | | |
| Network | | | |
| Wireless | WiFi 802.11 b/g/n (Single Band) | | |
| Video Compression Format | H.264, Motion JPEG | | |
| Resolution | 1920x1080/1280x720/640x360 | | |
| Max. Framerate | H.264, 1920x1080 30FPS | | |
| Audio I/O | Built-in Mic and Speaker | | |
| Audio Compression Format | G.711 u-law | | |
| Audio Communication | 2-way audio / Half duplex | | |
| IP | IPv4 | | |
| Protocol | TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTSP, NTP, HTTP, HTTPS, SSL, DHCP, SMTP, ICMP, ARP, DNS, UP-NP | | |
| Security | HTTPS(SSL) Login Authentication Digest Login Authentication | | |
| Environmental | | | |
| Operating Temperature / Humidity | 0°C ~ 40°C(+32°F ~ +104°F) / Less than 90% RH | | |
| Ingress Protection | Indoor | | |
| Electrical | | | |
| Input Voltage / Current | 5V/2A | | |
| Power Connector | micro-USBType | | |
| Mechanical | | | |
| Color | Black(dark gray) | | |
| Dimension (WxHxD/ØxH) | Ф85*84Н | | |
| Weight | 155g | | |
| | · · · · · · · · · · · · · · · · · · · | | |